


Tetra[®] LED Systems Power Supply

(GEPS12-60U-GL)

Power Supply Features

- Supports Tetra miniMAX, Tetra MAX, Tetra PowerMAX, Tetra PowerStrip and Tetra miniStrip LED lighting systems
- UL: Class 2 wiring per NEC Article 725, dry and damp location rated
- IEC: SELV, IP66 rated: separate enclosure required

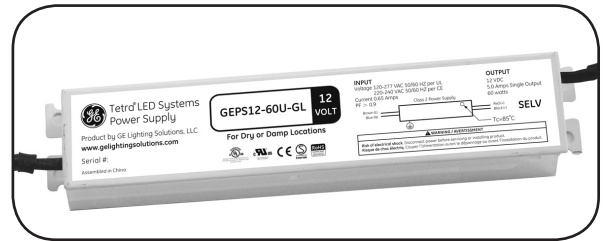

BEFORE YOU BEGIN

Read these instructions completely and carefully.

⚠ WARNING/AVERTISSEMENT

RISK OF ELECTRIC SHOCK:

- Disconnect power at fuse box or circuit breaker before servicing or installing product.
- Properly ground Tetra[®] power supply.

RISK OF FIRE:

- Use only Tetra[®] supply wire to make connection from Tetra[®] power supply to Tetra[®] LED strip.
- Use only approved wire for input/output connection. Minimum size 18 AWG (0.82 mm²)
- Follow all local codes.


RISQUES DE DÉCHARGES ÉLECTRIQUES

- Coupez l'alimentation électrique à la boîte de fusibles ou au disjoncteur avant l'entretien ou l'installation du produit.
- Assurez-vous de correctement mettre à terre l'alimentation électrique Tetra[®].


RISQUES D'INCENDIE

- N'utilisez que le fil d'approvisionnement Tetra[®] pour faire la connexion entre l'alimentation Tetra[®] et la bande DEL Tetra[®].
- N'utilisez que des fils approuvés pour les entrées/sorties de connexion. Taille minimum 18 AWG (0.82 mm²).
- Respectez tous les codes locaux.

Power Supply Installation

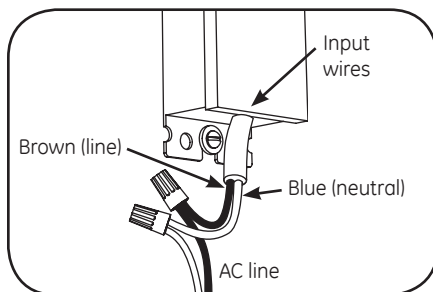

- 1 Connect the AC line to the brown (line) and blue (neutral) input wires of the power supply using 18-14 AWG (0.82-2.08 mm²) or 18-10 AWG (0.82-5.26 mm²) twist-on wire connectors.

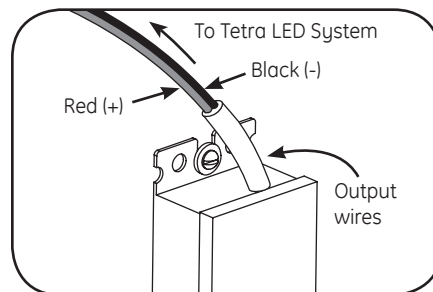

- 2 Connect the supply wire that is attached to the Tetra LED System to the red (+) and black (-) output wires of the power supply as outlined in the **"Electrical Connections"** section of your LED system's Installation Instructions.



NOTE: For CSA approval, a disconnect/toggle switch of appropriate rating needs to be placed within 29.5 ft. (9 m) of primary side of the power supply. The minimum rating of the switch must be either 120 or 220 Volts AC. The switch must also support twice the amount of input current.

NOTE: When installing power supply, connect to the appropriate sized building breaker or disconnect device for line and neutral connections, in accordance with local, state or country regulations.

NOTE: The grounding and bonding of the power supply and overall sign shall be done in accordance with National Electric Code (NEC) Article 600.

Power Supply Specifications

Performance Data	Min	Typical	Max
Input Voltage (VAC)	108	120-277	305
Input Frequency (Hz)	-	50/60	-
Input Current (A)	-	-	0.65
Output Voltage (VDC)	11.0	12.0	13.0
Output Current (ADC)	-	-	5.0
Output Power (W)	-	-	60
Environmental Operating Temperature Range	-40°C	+25°C	+60°C*
Environmental Humidity (non-condensing)	10%	-	90%
Environmental Storage Temperature Range	-40°C	-	+85°C
Dimensions	9.5 in. x 1.7 in. x 1.2 in. (240 mm x 43 mm x 30 mm)		

*Maximum case temperature is 85°C

Supports Tetra Products	SKUs	Maximum Load per Power Supply	Remote Mounting Distance			
			18 AWG/ 0.82 mm ²	16 AWG/ 1.31 mm ²	14 AWG/ 2.08 mm ²	12 AWG/ 3.31 mm ²
Tetra miniMAX	GEWHMMS8, GEWWMMS8-50K, GEWWMMS8-41K, GEWWMMS8	150 modules/60 ft. (18.29 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
	GEBLMMS5, GEGLMMS5, GERDMMS5	90 modules/36 ft. (10.97 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
Tetra MAX	GEWHMXTS6, GEWWMXTS6-50K, GEWWMXTS6-41K, GEWWMXTS6	120 modules/60 ft. (18.29 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
	GEWHMHTS6, GEWWMHTS6-50K, GEWWMHTS6-41K, GEWWMHTS6	80 modules/40 ft. (12.20 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
	GEBLMXWA5, GEGLMXWA5, GERDMXWA5	135 modules/54 ft. (16.46 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
	GERCMXWA6, GEYGMXS6	162 modules/54 ft. (16.46 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
	GERCMXWL6	160 modules/80 ft. (24.38 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
	GERDMXWL6	140 modules/70 ft. (21.34 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
Tetra PowerMAX	GEWHPMTL5, GEWWPMTL5-50K, GEWWPMTL5-41K, GEWWPMTL5	38 modules/25 ft. (7.62 m)	30 ft./9.1 m	50 ft./15.2 m	80 ft./24.4 m	120 ft./36.6 m
Tetra PowerStrip	GEWHSSPS3, GEWWSPPS3-50K, GEWWSPPS3-41K, GEWWSPPS3	16 modules/17 ft. (5.18 m)	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m
Tetra miniStrip	GEWHBSP3, GEWWBSP3-50K, GEWWBSP3-41K, GEWWBSP3	53 modules/53ft. (16.16m)	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m

Conforms to the following standards:



GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com
1-888-69-43-533

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. Tetra is a trademark of GE Lighting Solutions, LLC. The GE brand and logo are trademarks of the General Electric Company. © 2012 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.